

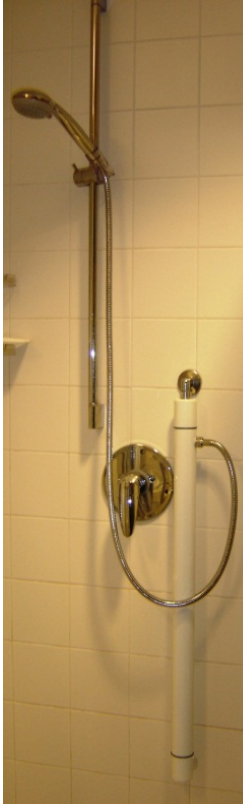


## POINT OF USE SOLUTION - "UF SHOWER FILTER"

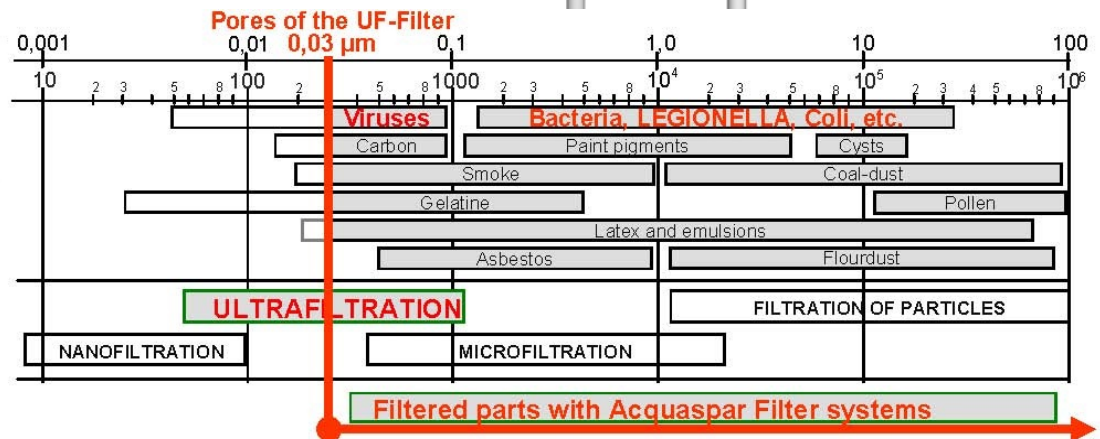

### Product:

The UF-Shower filter is especially designed to connect in a very simple way to the existing mixing valves. The self-cleaning UF-Filter element gives the best possible protection against being infected with the Legionella bacterium. The filters are certified by accredited European institutes.

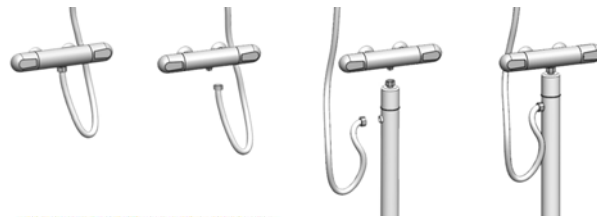

### Technical specifications mod:UFKW 50-700

Material housing	: PVC-C
Material membrane	: PES (Polyethersulfone)
Pore size of membrane	: 0,03 Micron
Reduction of bacteria	: 99,9999% (log 6)
Reduction of viruses	: 99,99% (log 4)
Maximum pressure	: 6 bar
Maximum water temperature	: 0 – 70°C
Flow rate	: 10-13 Liter/min.
Lifetime	: 3 – 5 Years

### Acquaspar

Via Cavour 11, 39100 Bolzano

Tel: 0039/0471/300850 Fax: 0039/0471/981273

[www.acquaspar.it](http://www.acquaspar.it) – [info@acquaspar.it](mailto:info@acquaspar.it)

